


HVAC

Thermal Break


Die No.: 35097

Wt.: 0.160-0.200 (KG/M)

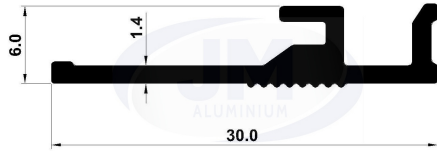


Die No.: 36813

Wt.: 0.449-0.554 (KG/M)




Die No.: 36812

Wt.: 0.438-0.539 (KG/M)




Die No.: 36816

Wt.: 0.984-1.283 (KG/M)

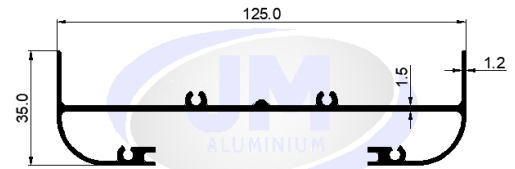


Die No.: 36807

Wt.: 0.622-0.763 (KG/M)




Die No.: 36809

Wt.: 0.519-0.639 (KG/M)



Die No.: 36810

Wt.: 0.246-0.305 (KG/M)



Die No.: 35090

Wt.: 0.250-0.310 (KG/M)




HVAC

Thermal Break


Die No.: 36808

Wt.: 0.714-0.902 (KG/M)

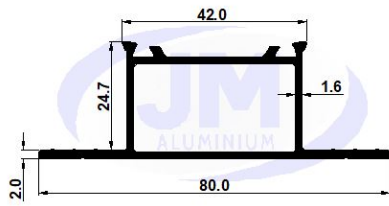


Die No.: 35070

Wt.: 0.600-0.700 (KG/M)

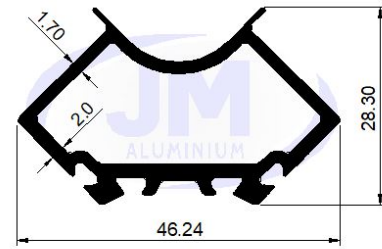


Die No.: 35071

Wt.: 0.670-0.780 (KG/M)




Die No.: 35075

Wt.: 0.650 - 0.750 (KG/M)

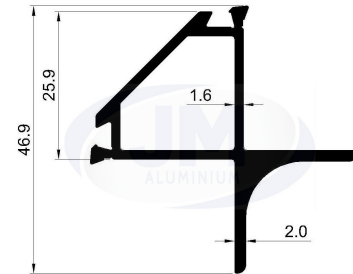


Die No.: 35076

Wt.: 0.770 - 0.880 (KG/M)

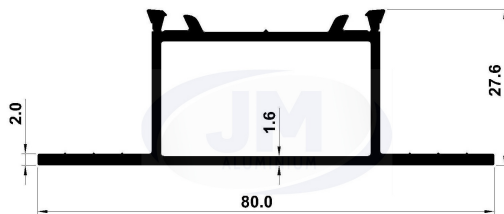


Die No.: 6843

Wt.: 0.850 - 0.960 (KG/M)

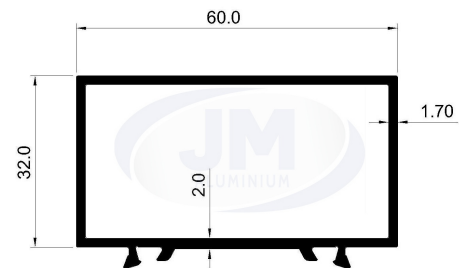


Die No.: 9806

Wt.: 0.600-0.625 (KG/M)



Die No.: 6844

Wt.: 1.160-1.210 (KG/M)

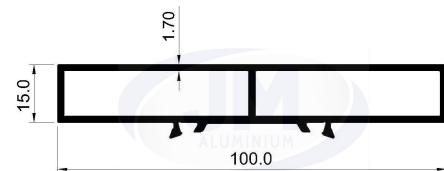


HVAC

Thermal Break


Die No.: 9803

Wt.: 0.775-0.780 (KG/M)

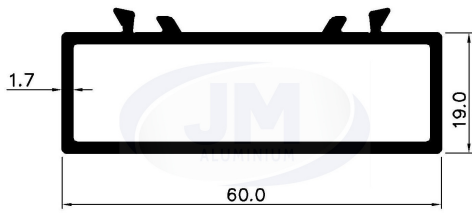


Die No.: 6845

Wt.: 1.135-1.170 (KG/M)

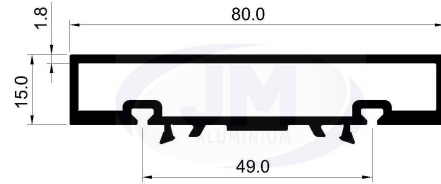


Die No.: 6824

Wt.: 0.785 - 0.825 (KG/M)




Die No.: 6842

Wt.: 1.135-1.175 (KG/M)




Die No.: 6873

Wt.: 0.525 - 0.625 (KG/M)

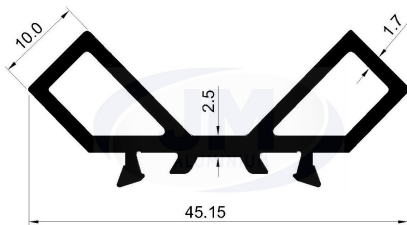


Die No.: 35074

Wt.: 0.540 - 0.630 (KG/M)

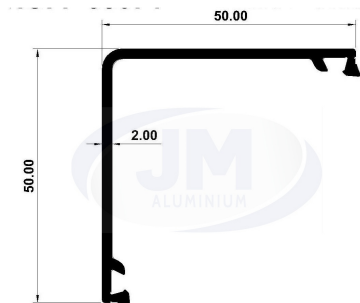


Die No.: 6874

Wt.: 1.100 - 1.200 (KG/M)

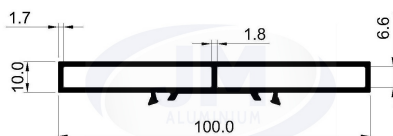

Die No.: 6846


Wt.: 0.330-0.370 (KG/M)

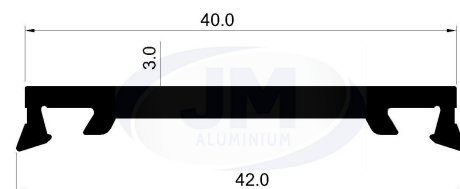

HVAC

Die No.: 6847

Wt.: 0.455 - 0.500 (KG/M)



Thermal Break

Die No.: 36811

Wt.: 0.435-0.520 (KG/M)

